

# Parameterization of Linear Controllers for Bumpless Switching in Multi-Controller Schemes

Joseph-Julien Yamé, \* and Michel Kinnaert<sup>†</sup>

*Department of Control Engineering and Systems Analysis*

*Université Libre de Bruxelles*

*50 Avenue F.D. Roosevelt, Brussels-1050, Belgium*

This paper concerns the realization and implementation of multi-controller systems, consisting of several linear controllers, subject to the bump phenomenon which occurs when switching between one controller acting in closed-loop and another controller in the set of “off-line” controllers waiting to take over the control loop. The paper gives a new and simple parameterization of such set of linear controllers, possibly having different state dimensions, to cope with the bump phenomenon and its undesirable transients in switched-mode systems. The proposed technique is based on a non minimal state-space representation allowing a common memory and a unique dynamics shared by all controllers in that set. It makes each initially open-loop unstable controller run in a stable way regardless of whether that controller is connected to the controlled process.

## I. Introduction

ADVANCED control systems deals with changing operating environments and such control systems exhibit themselves as hybrid dynamical systems which mix continuous behavior with discrete and logic decisions. In these control systems, it is common that the input to the controlled process is temporarily different from the output issued by the controller, such a difference being caused by a substitution due to the instantaneous switching between different control laws. Typical instances of input substitution occur in reconfigurable control or multi-controller schemes such as found in flight control for widening aircraft performance envelope, fault-tolerant systems, multimode systems, mode-switching from manual to automatic in industrial controllers, etc.... The discrepancy between the process input and the controller output might lead to performance degradation and instability of the closed-loop system. Solutions dealing with these problems are known as bumpless transfer techniques. The issue of bumpless transfer has been usually regarded as the same problem as that of the anti-windup problem which has attracted a tremendous research activity for several years, see e.g.<sup>2,9,5</sup> and references therein. In this paper, the bumpless transfer problem is considered for reconfigurable control or multi-controller schemes with the requirement that such bumpless transfer should be multidirectional in the sense that the swapping in and out of a controller in the loop should result in a transientless input signal to the plant regardless of the switching sequence. The bump phenomenon is known to be directly related to the initial value of the output of the off-line controller to be switched-on as compared to that of the active controller at the switching instant. Clearly, when these two output signals are equal or very close, “almost continuity” of the signal at the plant input is achieved, thereby allowing a “smooth” transition where undesirable transients are avoided or minimized. As in the controller windup problem,<sup>9</sup> it has been recognized that the bump phenomenon originating from the mismatch between controllers outputs can be translated into conditions on the

---

\*Corresponding author, AIAA Member, Email: joseph.yame@ulb.ac.be

<sup>†</sup>Email: michel.kinnaert@ulb.ac.be

controllers *states* or *memories*. Indeed, controllers being dynamical systems, their state must have the correct value when a mode switching occurs and, if this is not the case the corresponding control loops experience undesirable and harmful switching transients.

In simple mode switching where the aim is to switch from manual control to an ultimate controller in the loop, the bumpless transfer is usually unidirectional and is obtained by adding an *anti-windup* circuitry to the controller to be switched-on. The authors in reference<sup>6</sup> pointed out the need to consider bidirectional bumpless transfer between two controllers in modern industrial control systems where it is often the case that a newly designed controller should be temporarily installed and tested during normal process operation. They derived a bumpless transition scheme by recasting the problem in an associated tracking problem where the standby controller is viewed as a dynamical system whose output should track the online control signal by means of a two-degree-of-freedom controller. Bidirectionality in their bumpless transfer scheme is obtained by adding a symmetrical second tracking loop for the other controller. A direct approach to bumpless transfer in a two controllers configuration is also considered in reference<sup>12</sup> where the problem is formulated as an optimal linear quadratic control problem yielding a feedback gain which acts as a “sub-controller” for the standby controller; unfortunately bidirectionality is not considered there. For multi-controller schemes such as found in hybrid or switched-mode systems, *multidirectional* bumpless transfer and avoidance of undesirable switching transients should be mandatory, and to achieve this the common approach consists in appending each controller with an *anti-windup* circuitry, see e.g.<sup>7,14</sup> In reference,<sup>7</sup> the anti-windup circuitries are high gains feedback loops around all idle controllers which force the controllers outputs to track the process input whilst in the paper<sup>14</sup> each controller is augmented with dynamics identical to that of the plant in order to allow the controller states to evolve in an appropriate way when the controller is not connected to the plant input. Clearly, such bumpless transfer schemes become cumbersome and hard to implement when the number of controllers is large. Note also that in the high gain approach, the unstable zeros of the controllers limit the increase of the gains and the technique used by Zaccarian and Teel<sup>14</sup> might fail if a sufficiently accurate model of the plant is not available or if the plant is described by several models each model being valid in a certain region of the operating space.

In this paper, we use the simple fact that a state space realization of a system transfer function is not unique and that such a realization does not alter the input-output behavior of that system. Our idea is to search, among the infinite number of possible realizations of a controller in a given set of controllers, for a realization in which the *memories* and the *system matrix* of the state equations are common and shared by all controllers. It is then clear that with such a representation, the dynamical part of all controllers is the same and by feeding back the actual process input into this dynamics, that is by conditioning the controllers, no memory mismatch or state inconsistency can occur even at switching instants. This prevents the closed-loop dynamics to blow up or enter into unacceptable after-switching transients. The distinctive or switching parts of the controllers, removed from the dynamics, are realized through the static gains attached to their outputs. The parameterization technique used for the controllers is reminiscent to a classical technique for plant identification in adaptive control.<sup>11</sup>

## II. Bumpless transfer and switching transients

The noticeable manifestation of the bump phenomenon is a jump in the plant input and most importantly a significant deterioration of the actual closed-loop performance with respect to the ideal or expected performance following a controller switching. But quite surprisingly, and to the best of our knowledge, the concept of bumpless transfer itself has never been precisely formalized<sup>14</sup> and it is sometimes misunderstood as noted in reference.<sup>10</sup> A common vague statement which conveys the idea of bumpless transfer is that of switching “smoothly” as possible from one controller to another where the notion of smoothness is understood in *some sense*. Different meanings can be found in the literature and one of these meanings is related to the continuity property (in the mathematical sense) of the plant input signal at the switching instants, that is, an input signal which does not experience a jump or discontinuity in time when switching between controllers.<sup>1</sup> Such a definition makes sense only for continuous-time systems but does not extend to discrete-time systems since it is difficult

to talk about continuity in time on a discrete time setting. A slightly modified acceptance of the bumpless transfer concept is when the jump at the plant input is minimized in some way.<sup>12,6</sup> However, realizing an input signal which is continuous in time or which has a small jump at the switching instants does not preclude the closed-loop system from exhibiting very poor transients with the new on-line controller.<sup>8</sup> In most switched-mode systems, switching between controls aims at realizing instantaneous or fast transitions between different modes to maintain the performance of closed-loop systems, hence jumps or abrupt changes in the input signal of the plant are actually inherent to such control strategies. However, the underlying control objective constraints should not be violated by the transients induced by such instantaneous events. Therefore it is appropriate and meaningful to consider control switching as bumpless when the follow-up transients are reduced to some extent or possibly eliminated from the closed-loop system behavior albeit the occurrence of jumps in plant input signals and the performance still remains good after mode switching. This notion of bumpless transfer has been considered by Hanus<sup>8</sup> and later termed “*conditioned transfer*” by Peng et al.<sup>10</sup> It is worth noticing that this notion applies indifferently to continuous-time or discrete-time systems and conveys the idea that switching should take place without perturbing the closed-loop system to depart from its desired performance. Throughout this paper, the bumpless switching problem is understood in the sense of the aforementioned idea of conditioned transfer.

Consider the switched-mode system of figure 1 where we assume that the online controller in the time interval  $[0, t_s)$  is controller  $C_1$  and at time  $t_s$ , the second controller  $C_2$  is switched in closed-loop.

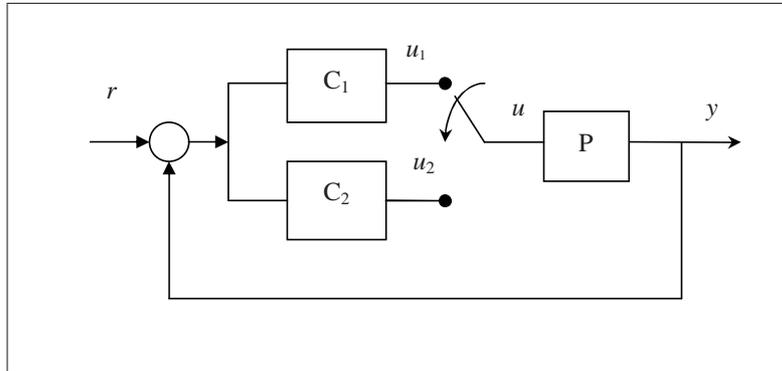


Figure 1. Switching from controller 1 to controller 2

The design methodologies for the controllers of such switched-mode systems are usually based on the synthesis of the closed-loop systems composed of the *individual* controllers as depicted in figure 2 with the desire that the plant output signal  $y$  of the switched-mode system in figure 1 be given by the ideal signal obtained by concatenating signal  $y_1$  on  $[0, t_s)$  with signal  $y_2$  on  $[t_s, \infty)$ , that is,

$$y_{id}(t) = (y_1 \overset{t_s}{\diamond} y_2)(t) \triangleq \begin{cases} y_1(t) & \text{for } t \in [0, t_s) \\ y_2(t) & \text{for } t \geq t_s \end{cases} \quad (1)$$

where it is assumed that at time  $t_s$ , system (a) and system (b) in figure 2 are in steady-state. This requirement means that the closed-loop system should instantaneously reach its steady-state after switching to controller  $C_2$  so as to have a transientless signal  $y$  after controller switching. If  $P$  denotes the transfer operator of the plant, then the output signal (1) is achieved in the switched-mode system of figure 1 through the following ideal input signal to the plant

$$u(t) = u_{id}(t) = (u_{1,id} \overset{t_s}{\diamond} u_{2,id})(t) \text{ for } t \in [0, \infty) \quad (2)$$

where  $y_1 = Pu_{1,id}$  and  $y_2 = Pu_{2,id}$ , with  $u_{1,id}$ ,  $u_{2,id}$  as given in the closed-loop systems of figure 2. A key feature of such ideal control  $u_{id}$  is that its segment on  $[t_s, \infty)$ , i.e. signal  $u_{2,id}$  from  $t_s$  to  $\infty$ , is issued from controller  $C_2$  which has been *constantly* connected to the plant in closed-loop. However, due to the very structure of the switched-mode system of figure 1, controller  $C_2$  can only be connected to the plant from time  $t_s$  to  $\infty$  and consequently its history (i.e. its state trajectory) on  $[0, t_s)$  has

no relation with the history of the plant in that time interval. This lack of dynamical consistency between the two state trajectories up to the switching instant is the main cause of the switching transients which impairs the performance of the closed-loop system when controller  $C_2$  becomes active. Bumpless switching should aim at guaranteeing such dynamical consistency.

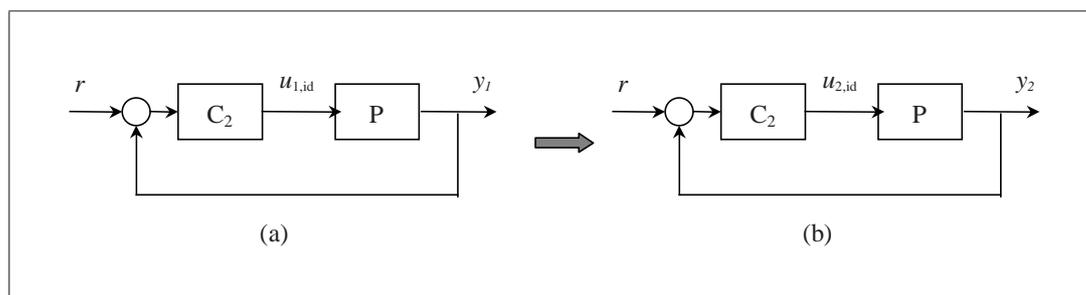


Figure 2. Closed-loop systems with (a) controller 1 and (b) controller 2

The actual input signal to the plant in the switched-mode system of figure 1 can be written as a perturbation to the ideal input signal, that is,

$$u(t) = u_{id}(t) + u_{tr}(t) \text{ for } t \in [0, \infty) \quad (3)$$

where  $u_{tr}(t) = (0 \overset{t_s}{\diamond} (u - u_{id}))(t)$  is the transient signal induced by the switching at time  $t_s$ . To see how this switching transient arises in the switched-mode system, let  $(F_1, G_1, H_1, J_1)$ ,  $(F_2, G_2, H_2, J_2)$ ,  $(A_P, B_P, C_P)$  denote the state-space realizations for controllers  $C_1$ ,  $C_2$  and plant  $P$  respectively. The closed-loop dynamics with controller  $C_2$  being constantly in the loop is given by

$$\begin{pmatrix} \dot{x}_2 \\ \dot{x}_P \end{pmatrix} = \begin{pmatrix} F_2 & -G_2 C_P \\ B_P H_2 & A_P - B_P J_2 C_P \end{pmatrix} \begin{pmatrix} x_2 \\ x_P \end{pmatrix} + \begin{pmatrix} G_2 \\ B_P J_2 \end{pmatrix} r \quad (4)$$

where  $x_2$  and  $x_P$  are the state vectors of  $C_2$  and  $P$ . The control issued by  $C_2$  is given by the readout map

$$u_{2,id} = \begin{pmatrix} H_2 & -J_2 C_P \end{pmatrix} \begin{pmatrix} x_2 \\ x_P \end{pmatrix} + J_2 r \quad (5)$$

When controller  $C_2$  is not connected to the plant in the switched-mode configuration of figure 1, its output signal  $u_2$  is still given by the right hand side of equation (5) but the evolution of the state vectors  $x_2$  and  $x_P$  is obtained from the dynamics

$$\begin{pmatrix} \dot{x}_2 \\ \dot{x}_P \\ \dot{x}_1 \end{pmatrix} = \begin{pmatrix} F_2 & -G_2 C_P & 0 \\ 0 & A_P - B_P J_1 C_P & B_P H_1 \\ 0 & -G_1 C_P & F_1 \end{pmatrix} \begin{pmatrix} x_2 \\ x_P \\ x_1 \end{pmatrix} + \begin{pmatrix} G_2 \\ B_P J_1 \\ G_1 \end{pmatrix} r \quad (6)$$

For notation convenience, let  $\xi = (x_2^T, x_P^T)^T$  denotes the joint state of the controller  $C_2$  and the plant where the superscript  $T$  stands for the transposition of the vector. The state trajectory of the closed-loop system with  $C_2$  constantly in the loop from the time origin  $t_0 = 0$  to time  $t$  and initial condition  $\xi(t_0) = \xi_0$  is given by

$$\xi_{id}(t) = \xi_{id}(t; t_0, \xi_0, r) = \Phi(t, t_0)\xi_0 + \Theta(t, t_0)r \quad (7)$$

where  $\Phi(t, t_0)$  is the state transition matrix of system (4) and  $\Theta(t, t_0)$  is an integral operator. When  $C_2$  is not connected to the plant, the trajectory of  $\xi$  is obtained from the dynamics (6). This trajectory is the first block component of vector  $\eta = (\xi^T, x_1^T)^T$  which is the solution of the differential equation (6) with initial condition  $\eta_0 = (\xi_0^T, x_{1,0}^T)^T$ . When the switched-mode system of figure 1 transfers

the control authority to controller  $C_2$  at time  $t_s$ , the closed-loop dynamics starts evolving on  $[t_s, \infty)$  according to equation (4) with initial condition  $\xi(t_s^-)$  obtained from the left limit of  $\eta(t)$  at  $t_s$ , that is,

$$\xi(t) = \Phi(t, t_s)\xi(t_s^-) + \Theta(t, t_s)r \quad (8)$$

while for the closed-loop system with controller  $C_2$  constantly connected to the plant, the state trajectory on  $[t_s, \infty)$  is

$$\xi_{id}(t) = \Phi(t, t_s)\xi_{id}(t_s) + \Theta(t, t_s)r \quad (9)$$

The switching transient is the *free motion* given by the difference between trajectories (9) and (8), that is,

$$\xi_{tr}(t) = \Phi(t, t_s) \cdot (\Delta\xi)_{t_s} \text{ for } t \geq t_s \quad (10)$$

and the transient in the input signal to the plant is

$$u_{tr}(t) = \begin{pmatrix} H_2 & -J_2C_P \end{pmatrix} \xi_{tr}(t) \quad (11)$$

where  $(\Delta\xi)_{t_s} = \xi_{id}(t_s) - \xi(t_s^-)$  is the mismatch between the ideal and actual state vector  $\xi$  at the switching instant. It is now clear that if at the switching instant  $t_s$ , the joint state  $\xi(t_s^-)$  of the plant and off-line controller  $C_2$  is equal to the ideal state  $\xi_{id}(t_s)$ , then the input signal (3) to the plant in the switched-mode system will be transientless after switching even if it experiences a jump  $(\Delta u)_{t_s} = u_2(t_s^+) - u_1(t_s^-) \neq 0$  at the switching instant (the arguments  $t_s^+$  and  $t_s^-$  stand respectively for the right and left limit at  $t_s$  of the corresponding signal).

It is interesting to note that the switching transient can be viewed as the impulse response of the dynamics  $\dot{\xi} = \mathcal{A}_{cl_2}\xi$  for an impulse of “height”  $(\Delta\xi)_{t_s}$  applied at time  $t_s$  and where  $\mathcal{A}_{cl_2}$  is the state matrix in equation (4). The dynamical consistency between the state of the plant and the state of controller  $C_2$  is traced in the ideal state  $\xi_{id}$  of the joint plant/controller which results from a controller constantly connected to the plant. It is also worth noticing from equation (6) that an inconsistency between these states is evidenced from the zeroed entry (2, 1) of the state matrix so that the plant state evolves independently from the state of the idle controller. Since in a switched-mode system, only one controller can be effectively connected to the plant at each time, a solution to the bumpless switching problem inspired from the above analysis is to realize a virtual constant connection of all idle controllers to the plant so as to assure the dynamical consistency between the state of the plant and the states of all controllers.

### III. Controllers parameterization

Assume that  $N$  single-input/single-output(SISO) linear controllers, not necessarily of the same order, have been designed for the control of a plant  $P$  as depicted in figure 3 and that each of these controllers taken alone and connected to the plant is stabilizing. Some of these controllers might be open-loop unstable such as, for instance, controllers having an integrating action. In the feedback control system of figure 3, the connection of a controller to the plant at each instant  $t$  is dependent on a switching signal  $\sigma(t)$  issued by a high-level supervisory system. The switched-mode control system operates as follows: at time  $t$ , the actual input  $u(t)$  to the process is given by  $u(t) = u_i(t)$  if the switching signal  $\sigma(t) = i$ , where  $i$  takes its value in the set  $\{1, 2, \dots, N\}$ . Assuming that a stabilizing switching policy has been designed through the synthesis of the supervisor, the main issues which remain to be solved for the switched-mode system is how to achieve bumpless transfer between the controllers in order to avoid undesirable transients and how to assure that each controller runs in a stable way even when it is not connected to the plant in closed-loop.

With reference to figure 3, let  $e = r - y$  be the control error and denote the SISO transfer functions

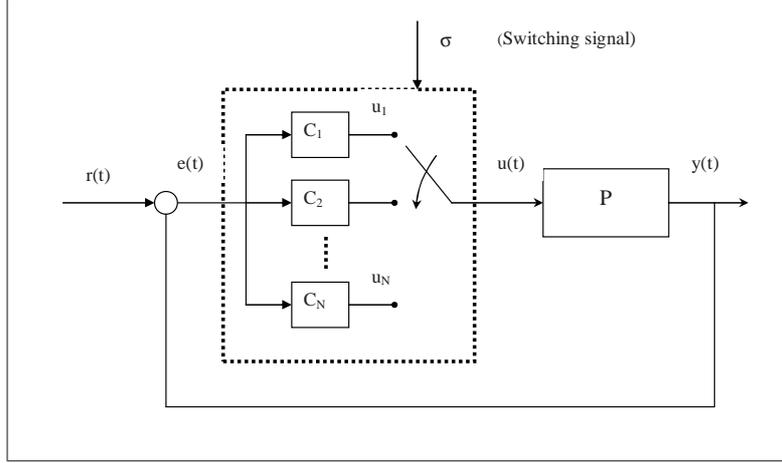


Figure 3. Switched-mode control system

of the controllers by

$$C_i(s) = \frac{u_i(s)}{e(s)} = \frac{n_{C_i}(s)}{d_{C_i}(s)} \quad (i = 1, \dots, N) \quad (12)$$

with coprime polynomials  $n_{C_i}(s)$ ,  $d_{C_i}(s)$  and set

$$n = \max_{i=1, \dots, N} \deg(d_{C_i}(s)) \quad (13)$$

where  $\deg(d_{C_i}(s))$  is the highest power of polynomial  $d_{C_i}(s)$ . Then, all transfer functions  $C_i(s)$  can always be written as

$$C_i(s) = \frac{N_i(s)}{D_i(s)} \quad (14)$$

where the denominators  $D_i(s)$  are such that

$$\deg(D_i(s)) = n, \quad \forall i = 1, \dots, N \quad (15)$$

and the numerators are of the form

$$N_i(s) = b_{i,0}s^n + b_{i,1}s^{n-1} + \dots + b_{i,n-1}s + b_{i,n} \quad (16)$$

Furthermore, each  $D_i(s)$  is a monic polynomial, i.e.,

$$D_i(s) = s^n + a_{i,1}s^{n-1} + \dots + a_{i,n-1}s + a_{i,n} \quad (17)$$

With the transfer functions form (14), compared to the initial transfer functions (12), there might be some pole/zero cancellations introduced by the designer which should be *stable*.

Next, decompose the controllers (14) into a strictly proper part  $C'_i(s)$  and a feedforward part  $b_{i,0}$

$$C_i(s) = C'_i(s) + b_{i,0} \quad (18)$$

and write the  $i$ th controller output as

$$u_i(s) = u'_i(s) + b_{i,0}e(s) \quad (19)$$

with  $u'_i(s)$  defined by

$$\frac{u'_i(s)}{e(s)} = C'_i(s) = \frac{N'_i(s)}{D'_i(s)} = \frac{b'_{i,1}s^{n-1} + \dots + b'_{i,n-1}s + b'_{i,n}}{s^n + a'_{i,1}s^{n-1} + \dots + a'_{i,n-1}s + a'_{i,n}} \quad (20)$$

where  $D'_i(s)$  are actually equal to  $D_i(s)$ . The strictly proper part  $C'_i(s)$  bears all the memory (dynamics) of controller  $i$  whilst no memory information is carried out by the feedforward part  $b_{i,0}$ . Now using (20), the output signal  $u'_i(s)$  can be written as

$$u'_i(s) = \frac{N'_i(s)}{\lambda(s)} e(s) + \frac{\lambda(s) - D'_i(s)}{\lambda(s)} u'_i(s) \quad (21)$$

where  $\lambda(s)$  is an *arbitrary* monic polynomial of order  $n$ ,  $\lambda(s) \neq D'_i(s)$ , and strictly Hurwitz, i.e.,

$$\lambda(s) = s^n + \lambda_1 s^{n-1} + \dots + \lambda_{n-1} s + \lambda_n \quad (22)$$

and, for  $p_i \in \mathbb{C}$

$$\lambda(p_i) = 0 \Rightarrow \text{Re}(p_i) < 0 \quad (23)$$

Note that equation (21) results in the same input-output transfer  $\frac{u'_i(s)}{e(s)}$  as in (20) but the controller is viewed as a two-input/single-output dynamical system in which one of the inputs is its output filtered by  $\frac{\lambda(s) - D'_i(s)}{\lambda(s)}$ . The denominators of the filters in equation (21) are independent of the controllers  $C_i$  and are all equal to  $\lambda(s)$ . For notation convenience, let

$$\beta_i(s) = N'_i(s) = b'_{i,1} s^{n-1} + \dots + b'_{i,n-1} s + b'_{i,n} \quad (24)$$

and

$$\begin{aligned} \alpha_i(s) &= \lambda(s) - D'_i(s) \\ &= (\lambda_1 - a'_{i,1}) s^{n-1} + (\lambda_2 - a'_{i,2}) s^{n-2} + \dots \\ &\quad + (\lambda_n - a'_{i,n}) \end{aligned} \quad (25)$$

and introduce the constant vectors

$$\beta_i^T = \begin{pmatrix} b'_{i,n} & b'_{i,n-1} & \dots & b'_{i,1} \end{pmatrix} \quad (26)$$

$$\alpha_i^T = \begin{pmatrix} \alpha_{i,n} & \alpha_{i,n-1} & \dots & \alpha_{i,1} \end{pmatrix} \quad (27)$$

with  $\alpha_{i,k} = \lambda_k - a'_{i,k}$ . Equation (21) has now the simple form

$$u'_i(s) = \beta_i^T \mathcal{F}(s) e(s) + \alpha_i^T \mathcal{F}(s) u'_i(s) \quad (28)$$

where the multi-output filter  $\mathcal{F}(s)$  expressed in vector block form is given by

$$\mathcal{F}(s) = \frac{1}{\lambda(s)} \begin{pmatrix} 1 \\ s \\ \dots \\ s^{n-1} \end{pmatrix} \quad (29)$$

From [4, page 239], the vector (29) can be seen as the product

$$\mathcal{F}(s) = (sI - \mathcal{A}_\lambda)^{-1} b_\lambda \quad (30)$$

where  $\mathcal{A}_\lambda$  is the companion matrix whose characteristic equation is given by  $\lambda(s) = 0$ ,

$$\mathcal{A}_\lambda = \begin{pmatrix} 0 & 1 & 0 & \dots & 0 \\ 0 & 0 & 1 & \dots & 0 \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ 0 & 0 & 0 & 0 & 1 \\ -\lambda_n & -\lambda_{n-1} & -\lambda_{n-2} & \dots & -\lambda_1 \end{pmatrix} \quad (31)$$

and

$$b_\lambda = \begin{pmatrix} 0 \\ 0 \\ \cdot \\ \cdot \\ 0 \\ 1 \end{pmatrix} \quad (32)$$

A property of  $\mathcal{A}_\lambda$  which will be used later is that this matrix is non-singular if and only if  $\lambda_n \neq 0$  [4, page 65], which is the case here by the strict Hurwitz property (23) of polynomial  $\lambda(s)$ . From (28) and (30), the two-input/single-output dynamical systems (21) admits the controller canonical state-space representation

$$\begin{pmatrix} \dot{\varsigma}_1(t) \\ \dot{\varsigma}_2(t) \end{pmatrix} = \begin{pmatrix} \mathcal{A}_\lambda & 0 \\ 0 & \mathcal{A}_\lambda \end{pmatrix} \begin{pmatrix} \varsigma_1(t) \\ \varsigma_2(t) \end{pmatrix} + \begin{pmatrix} b_\lambda & 0 \\ 0 & b_\lambda \end{pmatrix} \begin{pmatrix} e(t) \\ u'_i(t) \end{pmatrix} \quad (33)$$

with the outputs  $u'_i(t)$  given by

$$u'_i(t) = \beta_i^T \varsigma_1(t) + \alpha_i^T \varsigma_2(t) \quad (34)$$

The representation (33), (34) realizes *exactly* each of the  $N$  transfer functions  $C'_i(s)$  with the main advantage that the dynamics (memories) are independent of these transfer functions and only the readout map (34) actually characterizes  $C'_i(s)$ . The dimension of the state-space is  $2n$ , hence  $2n$  memories are sufficient for describing the  $N$  dynamical systems  $C'_i(s)$ . Returning back to equation (19), the outputs of the controllers  $C_i(s)$  are

$$\begin{aligned} u_i(t) &= u'_i(t) + b_{i,0}e(t) \\ &= \beta_i^T \varsigma_1(t) + \alpha_i^T \varsigma_2(t) + b_{i,0}e(t) \end{aligned} \quad (35)$$

The dynamical part of the  $N$  controllers is determined by the state matrix in (33). Therefore, if a transfer function  $C_i$  from  $e$  to  $u_i$  were originally unstable, the boundedness of the corresponding control signal in (35), whether it is connected or not to the plant, is guaranteed by the choice of  $\lambda(s)$  as a strictly Hurwitz polynomial.

To proceed further, let us assume that coefficients  $b_{i,0}$  are all equal to a constant  $b_0$ ; the general case of non-constant feedforward terms will follow. From the operation of the switched-mode control system, only one controller can be connected to the plant at each instant. If  $\sigma(t) = m$  for some  $m \in \{1, \dots, N\}$  at time  $t$ , the plant input is equal to the output of controller  $m$  and the following equations hold for controller  $m$

$$u(t) = u_m(t) = \beta_m^T \varsigma_1(t) + \alpha_m^T \varsigma_2(t) + b_0e(t) \quad (36)$$

$$\begin{pmatrix} \dot{\varsigma}_1(t) \\ \dot{\varsigma}_2(t) \end{pmatrix} = \begin{pmatrix} \mathcal{A}_\lambda & 0 \\ 0 & \mathcal{A}_\lambda \end{pmatrix} \begin{pmatrix} \varsigma_1(t) \\ \varsigma_2(t) \end{pmatrix} + \begin{pmatrix} b_\lambda & 0 \\ -b_\lambda b_0 & b_\lambda \end{pmatrix} \begin{pmatrix} e(t) \\ u(t) \end{pmatrix} \quad (37)$$

where equation (37) is obtained from (33) by using

$$u'_m(t) = u_m(t) - b_0e(t) = u(t) - b_0e(t) \quad (38)$$


The difference between the dynamical equations (37) and (33) is that the *actual* plant input  $u(t)$  is now *fed back* in the filter and for controller  $m$  which is effectively connected to the plant input, the above equations (36), (37) are completely equivalent to equations (33) and (35). In view of equation (37), and from the fact that all controllers outputs  $u_i(t)$  ( $i = 1, \dots, N$ ) are obtained from the  $2n$  states of the same dynamics (33), the set of all controllers  $C_i$  can now be considered as a unique dynamical system with two inputs ( $e, u$ ),  $2n$  states ( $\varsigma_1, \varsigma_2$ ), and  $N$  outputs  $u_i$  ( $i = 1, \dots, N$ ). In this new setting, the filter states are no longer driven by the dynamical part ( $u'_i$ ) of the floating outputs  $u_i$  as it should have been the case in the initial setting (see equation (33)) and these outputs  $u_i$  for all  $i \neq m$  given by the readout equation (35) are clearly different from the outputs as computed by  $u_i(s) = C_i(s)e(s)$  by the individual controllers as in figure 1. However, these differences does not matter since when a switching occurs when the system is in steady-state with zero tracking error and connects a new controller output, say  $u_l$ , to the plant input  $u$ , it will be shown that this new active controller output takes upon the correct values that would have result from  $u_l(s) = C_l(s)e(s)$  or equivalently from (33) and (35) as if it has been constantly in the loop.

The multi-controller itself can now be viewed as the system, of which the input is  $e$  and the output is the input signal  $u$  to the plant as depicted in figure 4, described by

$$\begin{cases} \dot{\varsigma}(t) &= \mathcal{A}\varsigma(t) + \mathcal{B}_u u(t) + \mathcal{B}_e e(t) \\ u_i(t) &= C_i \varsigma(t) + b_0 e(t) \quad \text{for } i = 1, 2, \dots, N \\ u(t) &= u_{\sigma(t)}(t) = u_i(t) \quad \text{if } \sigma(t) = i \text{ with } i \in \{1, 2, \dots, N\} \end{cases} \quad (39)$$

where  $\varsigma = (\varsigma_1^T, \varsigma_2^T)^T$  and the matrices in equations (39) are the following block matrices

$$\mathcal{A} = \begin{pmatrix} \mathcal{A}_\lambda & 0 \\ 0 & \mathcal{A}_\lambda \end{pmatrix}, \quad \mathcal{B}_u = \begin{pmatrix} 0 \\ b_\lambda \end{pmatrix}, \quad \mathcal{B}_e = \begin{pmatrix} b_\lambda \\ -b_\lambda b_0 \end{pmatrix}, \quad C_i = \begin{pmatrix} \beta_i^T & \alpha_i^T \end{pmatrix} \quad (40)$$

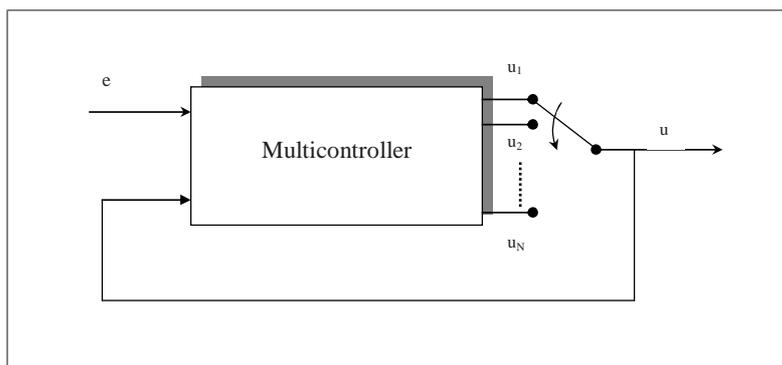

**Figure 4. Multi-controller representation**

From the very nature of the filter, the state of the multi-controller is continuous at the switching instants, that is,  $\varsigma(t_s) = \varsigma(t_s^-) = \varsigma(t_s^+)$  for any switching instant  $t_s$ . Moreover, the joint plant/controller state is always dynamically consistent. This is achieved through the ‘tracking’ (via feedback) of the actual plant input which makes the state of the multi-controller correspond to the effective input/output signals ( $e, u$ ). Indeed, for plant  $P$  with state vector  $x_P$  and state-space realization  $(A_P, B_P, C_P)$ , the joint plant/multicontroller state of the closed-loop system of figure 5 satisfies the dynamics

$$\begin{pmatrix} \dot{\varsigma} \\ \dot{x}_P \end{pmatrix} = \begin{pmatrix} \mathcal{A} + \mathcal{B}_u C_\sigma & -(\mathcal{B}_u b_0 + \mathcal{B}_e) C_P \\ B_P C_\sigma & A_P - B_P b_0 C_P \end{pmatrix} \begin{pmatrix} \varsigma \\ x_P \end{pmatrix} + \begin{pmatrix} \mathcal{B}_u b_0 + \mathcal{B}_e \\ B_P b_0 \end{pmatrix} r \quad (41)$$

where  $C_\sigma = C_i$  if  $\sigma(t) = i$ . The dynamical consistency is guaranteed by the non-zero entry (2,1) of the closed-loop state matrix of (41) so that the evolution of the plant state is linked to the controllers state and vice-versa. Since all pending controllers outputs  $u_i$  in equation (39) are computed from the same closed-loop dynamics producing state vector  $\varsigma$ , it appears that their behavior is virtually the same as if they have been constantly connected to the plant.

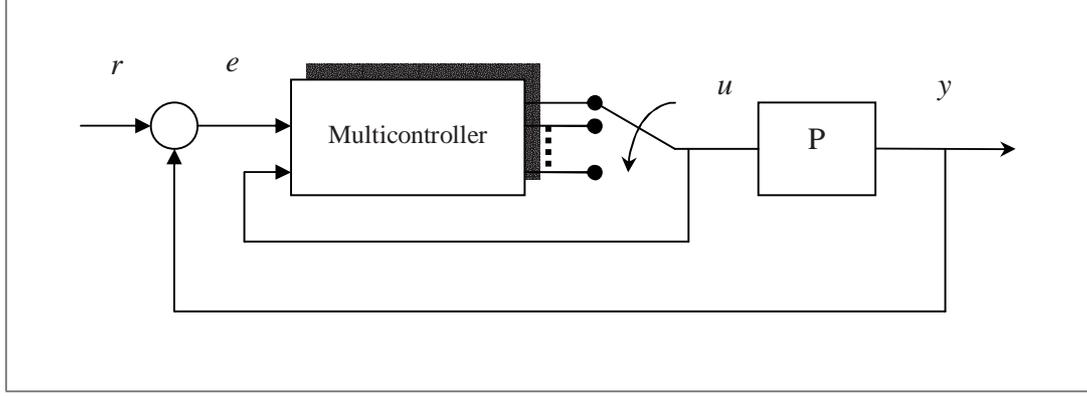


Figure 5. Closed-loop system with state-shared multicontroller

Next, assume that the switching instants are such that the closed-loop system of figure 5, when in any of its control modes, has already reached its steady-state and the tracking error is zero ( $e = 0$ ). Then, the equilibrium points of the joint plant/multicontroller state in all control modes are identical. Indeed, if  $P(s) = C_P(sI - A_P)^{-1}B_P$  denotes the transfer function of the plant, the input signal to the plant under the above assumption of zero tracking error in steady-state is given by  $u^{(0)} = P(0)^{-1}r$  where  $P(0) \neq 0$  is the plant static gain which might be finite or infinite. The equilibrium state of the multicontroller system (39) satisfies equation

$$\mathcal{A}\zeta^{(0)} + \mathcal{B}_u u^{(0)} = 0 \quad (42)$$

and from the non-singularity of matrix  $\mathcal{A}_\lambda$ , this equilibrium is unique and given by

$$\zeta^{(0)} = -\mathcal{A}^{-1}\mathcal{B}_u P(0)^{-1}r \quad (43)$$

The corresponding equilibrium state of the plant is given by

$$x_P^{(0)} = -A_P^{-1}B_P P(0)^{-1}r \quad \text{if } A_P \text{ is not singular} \quad (44)$$

otherwise it is the solution of the algebraic equations

$$\begin{cases} A_P x_P^{(0)} = 0 \\ C_P x_P^{(0)} = r \end{cases} \quad \text{if } A_P \text{ is singular} \quad (45)$$

Thus, the equilibrium points are independent of the control modes since  $\mathcal{A}$  and  $\mathcal{B}_u$  are invariant with respect to the modes. In any control mode, the joint plant/multicontroller equilibrium state  $\xi^{(0)} = \left( (\zeta^{(0)})^T, (x_P^{(0)})^T \right)^T$  is the “ideal” state (see section II) when the steady-state has been reached in that mode. Now, referring to section II, it is trivial to see that when switching occurs at steady-state under the zero tracking-error assumption, a transientless plant input signal is achieved from the continuity of the joint state  $\xi$  at the switching instant and from the fact that the ideal joint state  $\xi_{id}(t_s^+)$  to be reached after switching and the actual state  $\xi(t_s^-)$  before switching are the same and equals to  $\xi^{(0)}$ . Note that the input signal might experience a jump at the switching instant  $t_s$  when transferring from controller  $j$  to controller  $i$ ; this jump is given by  $(\Delta u)_{t_s} = u_i(t_s^+) - u_j(t_s^-) = (C_i - C_j)\zeta(t_s)$  where  $\zeta(t_s) = \zeta^{(0)}$ . Therefore, a jump at the plant input does not preclude the input signal  $u(t)$  to exhibit a *transientless* behavior after the switching instants, and also the closed-loop tracking performance is maintained after switching.

For the general case where the coefficients  $b_{i,0}$  are not all identical, the following state equation for the filter are obtained using the same reasoning lines as previously developed,

$$\begin{pmatrix} \dot{\varsigma}_1(t) \\ \dot{\varsigma}_2(t) \end{pmatrix} = \begin{pmatrix} \mathcal{A}_\lambda & 0 \\ 0 & \mathcal{A}_\lambda \end{pmatrix} \begin{pmatrix} \varsigma_1(t) \\ \varsigma_2(t) \end{pmatrix} + \begin{pmatrix} b_\lambda & 0 \\ -b_\lambda b_{\sigma(t),0} & b_\lambda \end{pmatrix} \begin{pmatrix} e(t) \\ u(t) \end{pmatrix} \quad (46)$$

and the  $N$  outputs  $u_i(t)$  are still given by (35). The input matrix in the state equation (46) is now *dependent* on a time varying parameter which is actually piecewise constant but undergoes a jump at the switching instants. It is worth noticing that the jump in the input matrix coefficients does not preclude the *continuity* of the state variables ( $\varsigma_1, \varsigma_2$ ) and it is not difficult to show that the state variables are indeed continuous functions.<sup>3</sup> Moreover, the joint plant/multicontroller equilibrium state  $\xi^{(0)} = \left( (\varsigma^{(0)})^T, (x_P^{(0)})^T \right)^T$  is not altered since the time varying parameter enters only into matrix  $\mathcal{B}_e$  of the dynamics (39). This guarantees that, under the same assumption as in the previous case, the multi-controller enters directly from one mode to another without any undesirable transient response.

### Remarks

The derivation of the parameterization of a set of linear controllers done in the continuous-time domain in this paper extends *mutatis mutandis* to the discrete-time setting and the bumpless switching property, i.e. the elimination of the switching transients, keeps its full meaning in that setting. It should be stressed that simply making the states of the control laws to be the same does not result in bumpless switching, the further step taken in transforming equation (33) into equation (37) to realize an equivalent controller is compulsory to achieve the bumpless switching property. It is this realization (37) which makes the pending controllers to behave virtually as constantly connected to the plant. By the way, it is interesting to note that the resulting multi-controller system has an inherent implicit observer property<sup>13</sup> in which the shared-state  $\varsigma$  of the multicontroller includes an “observer state” for the plant. With hindsight, it is clear from this implicit observer viewpoint that the plant state and the multicontroller state will always be dynamically consistent since  $\varsigma$  “tracks” in some way the plant state. If we regard the error signal as a generalized plant output, then the  $N$  controllers outputs  $u_i$  of equation (39) can be seen equivalently as  $N$  state-feedback control laws with feedback gains  $\mathcal{C}_i$ , combined with a unique “observer” producing state  $\varsigma$ . This viewpoint corroborates the constant virtual connection of all controllers in the feedback loop.

## IV. Example

As a simple example illustrating the bumpless switching property of the proposed controllers parameterization, consider the first order linear plant with transfer function  $G(s) = \frac{1}{s+1}$  controlled by a switched-mode controller with two control modes. The controllers are digitally implemented with a zero-order hold at sampling period  $h = 0.01s$ . The initial controller in the loop has discrete-transfer function  $C_1(z) = \frac{z-0.95}{z-1}$  and the control law switches at time  $t = 10s$  to the final controller  $C_2(z) = \frac{z-0.5}{z-1}$ . The state-shared realization for these two controllers yields the following multi-controller system (in discrete time)

$$\begin{pmatrix} \varsigma_1(k+1) \\ \varsigma_2(k+1) \end{pmatrix} = \begin{pmatrix} 0.5 & 0 \\ 0 & 0.5 \end{pmatrix} \begin{pmatrix} \varsigma_1(k) \\ \varsigma_2(k) \end{pmatrix} + \begin{pmatrix} 1 & 0 \\ -1 & 1 \end{pmatrix} \begin{pmatrix} e(k) \\ u(k) \end{pmatrix} \quad (47)$$

and floating control signals given by

$$\begin{pmatrix} u_1(k) \\ u_2(k) \end{pmatrix} = \begin{pmatrix} 0.05 & 0.5 \\ 0.5 & 0.5 \end{pmatrix} \begin{pmatrix} \varsigma_1(k) \\ \varsigma_2(k) \end{pmatrix} + \begin{pmatrix} 1 & 0 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} e(k) \\ u(k) \end{pmatrix} \quad (48)$$

The actual process input determined by the switching signal is given by  $u(k) = u_{\sigma(k)}$  with  $\sigma(k) \in \{1, 2\}$ . Figures 6 and 7 below show the process output, process input (actual control) and pending controllers output signals for the two different implementations of the switched-mode controller. Note that in the direct implementation (structure of figure 3), the control system experiences an undesirable transient which significantly deteriorates the tracking performance after switching. The state-shared multi-controller (structure of figure 5) shows successful bumpless switching without any transients after switching and it is worth noticing how the pending controller output tracks the actual process input.

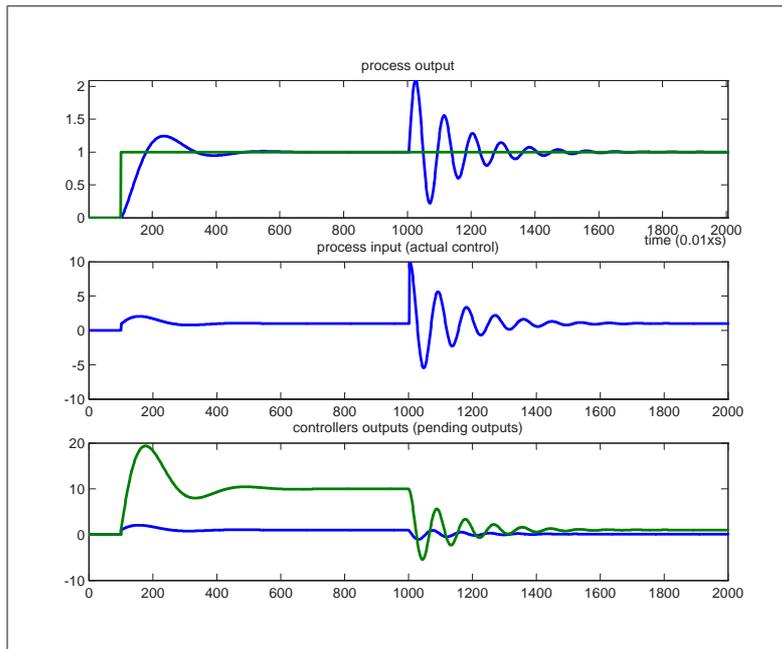


Figure 6. Simulation results for the direct implementation of the multi-controller

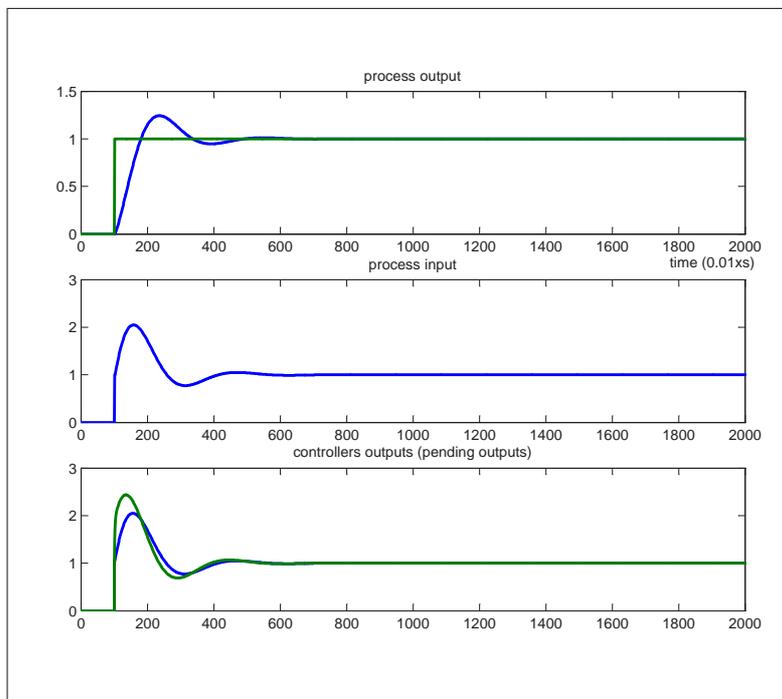


Figure 7. Simulation results for the state-shared multi-controller

## V. Conclusion

In this paper, a characterization of the bump phenomenon in switched-mode systems has been derived in terms of the mismatch between the joint plant/controller states before and after mode switching. Based on this characterization, a state-space realization achieving bumpless switching for a given multi-controller system has been proposed using a common memory obtained through a simple parameterization of all controllers. Besides the bumpless transfer property of the realization, the dimension of the common memory, that is the number of states shared by the controllers, is independent of the cardinality of the set of controllers. This fact is important when the number of controllers is large such as in reconfigurable control for fault tolerant systems or in multiple operating regime systems. Moreover, the common dynamics of the controllers, apart being stable, can be chosen arbitrarily and independent of the controlled plant. Note that in most bumpless switching schemes, the controllers dynamics are augmented with observers or models of the controlled plant which make these schemes hardly applicable to plant with multiple models. The proposed bumpless switching solution which is independent of the process model is therefore particularly indicated in controller reconfiguration following dynamic changes in the controlled process. In addition to providing a parameterization of all controllers, the canonical form of the controllers state equations also simplifies the real-time implementation of the multi-controller.

## Acknowledgment

This work is supported by the European project IFATIS under the Information Society Technology Research program EU-IST-2001-32122.

## References

- <sup>1</sup>Arehart A.B., Wolovich W.A. (1996). Bumpless Switching Controllers. *Proceedings of the 35th IEEE Conference on Decision and Control*, pp. 1654-1655, Kobe, Japan, 1996
- <sup>2</sup>Aström K.J., Wittenmark B. (1984). *Computer-Controlled Systems: Theory and Design*. Prentice-Hall, Englewood Cliffs, New Jersey
- <sup>3</sup>Bellman, R., Cooke K.L. (1995). *Modern Elementary Differential Equations*. Dover Publications Inc., 2 ed., New York
- <sup>4</sup>Chen C-T. (1984). *Linear System Theory and Design*. Saunders College Publishing, New York
- <sup>5</sup>Glattfelder A. H. et al. (Editors) (2000). Anti-Windup Control. *European Journal of Control*, Special Issue, Vol. 6, N°5
- <sup>6</sup>Graebe S.F., Ahlén A.L.B. (1996). Dynamic Transfer Among Alternative Controllers and Its relation to Anti-windup Controller Design. *IEEE Transactions on Control Systems Technology*, Vol. 4, N°1, pp. 92-99
- <sup>7</sup>Green M., Limebeer D.J.N. (1995). *Linear Robust Control*. Prentice-Hall Inc., Englewood Cliffs, New Jersey
- <sup>8</sup>Hanus R. (1996). Systèmes d'Anti-Emballement des Régulateurs. In Rachid A. (Ed.) - *Systèmes de Régulation*, pp. 55-83, Masson & Cie, Paris.
- <sup>9</sup>Hanus R., Kinnaert M., Henrotte J.L. (1987). Conditioning Technique, a General Anti-Windup and Bumpless Transfer Method. *Automatica*, Vol. 23, N°6, pp. 729-739
- <sup>10</sup>Peng Y., Vrancic D., Hanus R. (1996). Anti-windup, Bumpless, and Conditioned Transfer Techniques for PID Controllers. *IEEE Control Systems Magazine*, Vol. 10, N°4, pp 48-57
- <sup>11</sup>Sastry S., Bodson M. (1989). *Adaptive Control: Stability, Convergence, and Robustness*. Prentice-Hall Inc., Englewood Cliffs, New Jersey
- <sup>12</sup>Turner M.C., Walker D.J. (2000). Linear Quadratic Bumpless Transfer. *Automatica*, Vol. 36, pp. 1089-1101
- <sup>13</sup>Walgama K.S., Sternby J. (1990). Inherent Observer Property in a Class of Anti-Windup Compensators. *International Journal of Control*, Vol. 52, N°3, pp. 705-724
- <sup>14</sup>Zaccarian L., Teel A.R. (2002). A Common Framework for Anti-Windup, Bumpless Transfer and Reliable Designs. *Automatica*, Vol. 38, pp. 1735-1744